

Exhibit B



Sacramento, California

Fax: (360) 251-8193

Email: support@battensplus.comWeb site: <http://www.BattensPlus.com>

Contacts: Brad Blake - (530) 306-0224 Jim Blake pager - (916) 336-0028 Ted Anderson - (916) 999-3306

This installation guide must be strictly followed

Figure 1


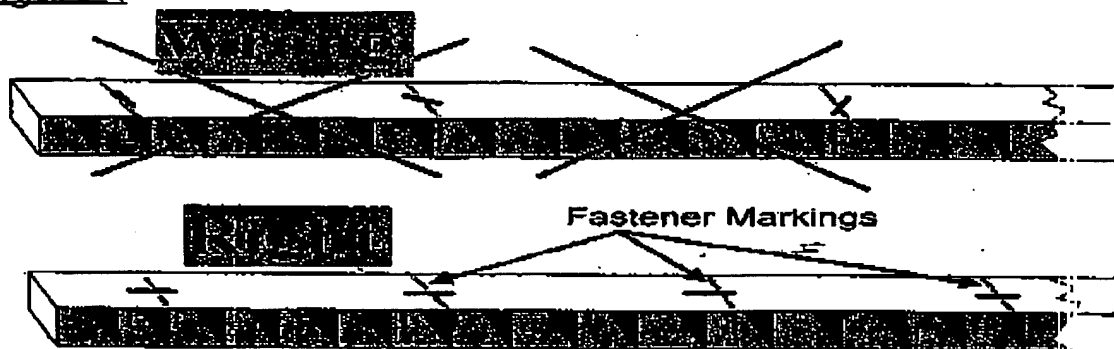


Figure 2 - Fastening Guide

BattenUP Polypropylene Batten

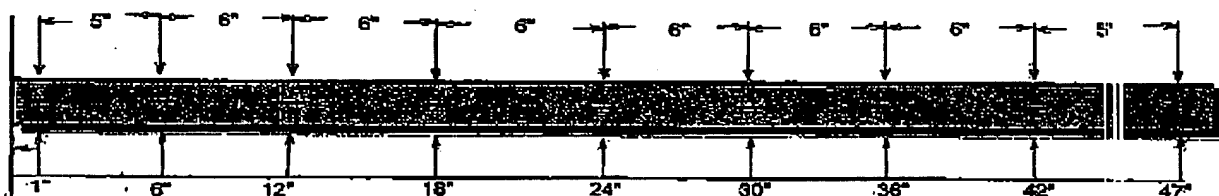

Each batten has nail markings. Each mark runs vertical to the batten; the same direction as the flutes.

Figure 1 shows the proper placement of fasteners. The nail markings are placed on the batten according to the "Fastening Guide" Figure 2.

Important:

If you are double felting or installing on a pitch of 7in12 or greater, 1 1/2-inch-long or longer staples should be used. Air pressure should be adjusted so staple is flush with the surface of the batten.

BattenUP battens must be fastened with 1 1/2-inch-long minimum, 1-inch-crown staples OR 1 3/4-inch-long minimum, 7/16-inch-crown staples.

Staples Must Be Placed Horizontally On The Batten.

Battens are to be fastened at 6-inches on center with the outside fasteners placed 1-inch from the outside edge of the batten.

From left to right staples will be placed as follows:

1", 6", 12", 18", 24", 30", 36", 42", 47"

Safety: Plastic and wood dust and construction debris should be blown off roof deck for safety purposes.

BEST AVAILABLE COPY

EXHIBIT

B

Type_Document_Title_Here


Page 1 of 1

Introducing BattenUP Plastic Roof Tile Battens.

You are visitor number: **558** Since Dec. 26, 2003. Thanks for stopping by!
Counter provided by www.GoStats.com

Please Click To Enter Battens Plus

New or Updated Page/s Added: October 23, 2004


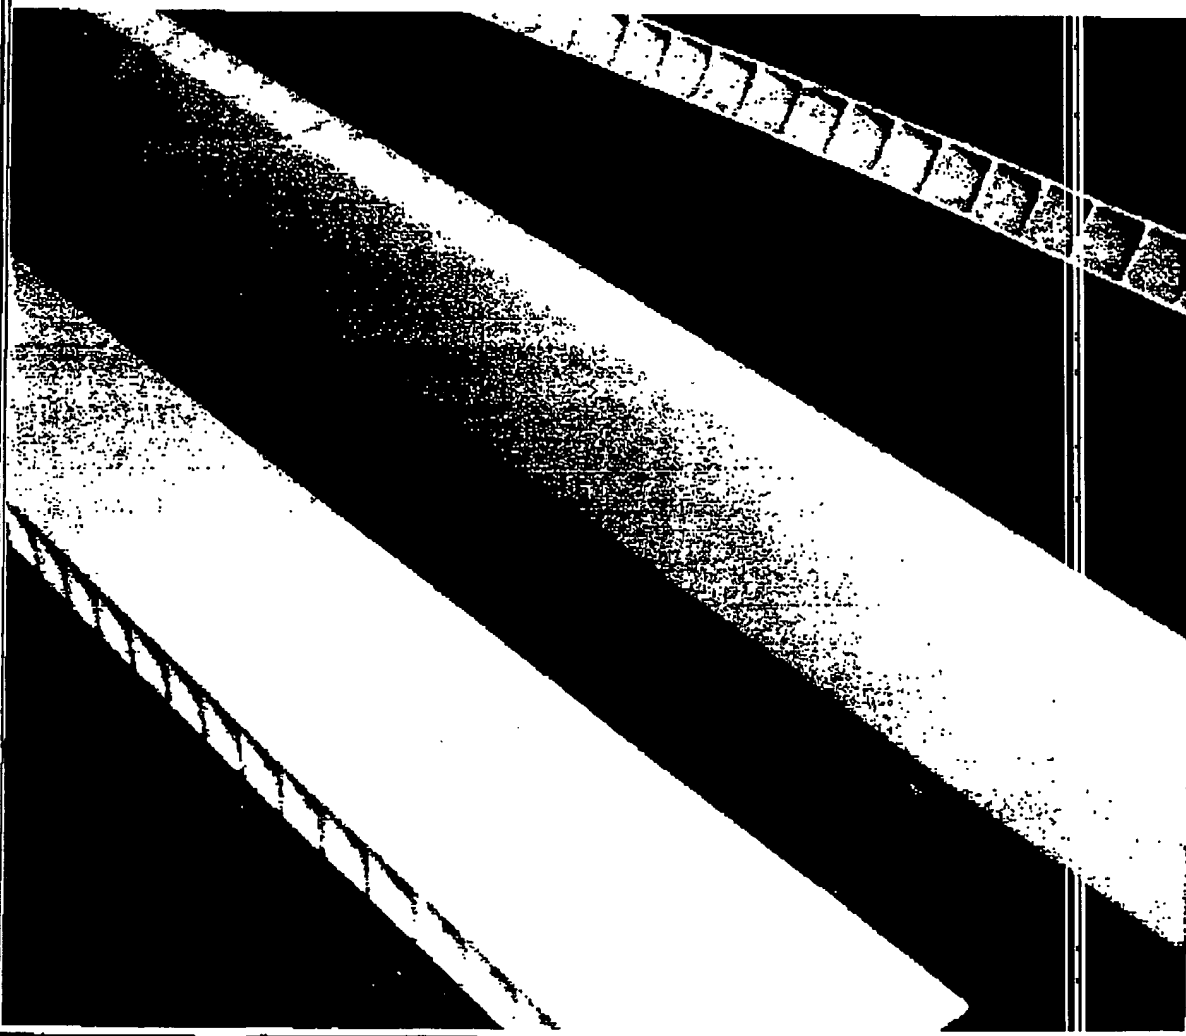


BEST AVAILABLE COPY



Installation Guide

BattenUP battens are designed to meet required Standards and Fully Engage Villa and Flat cement and clay roof tiles.

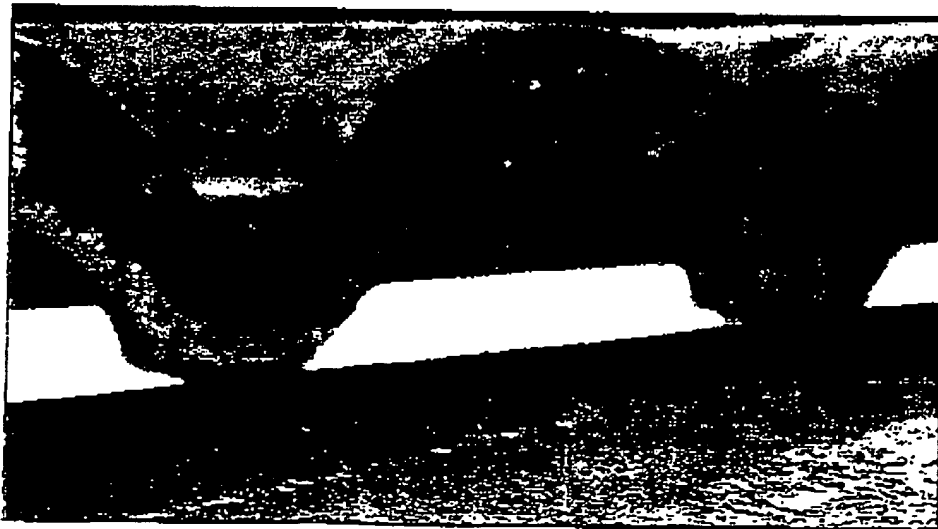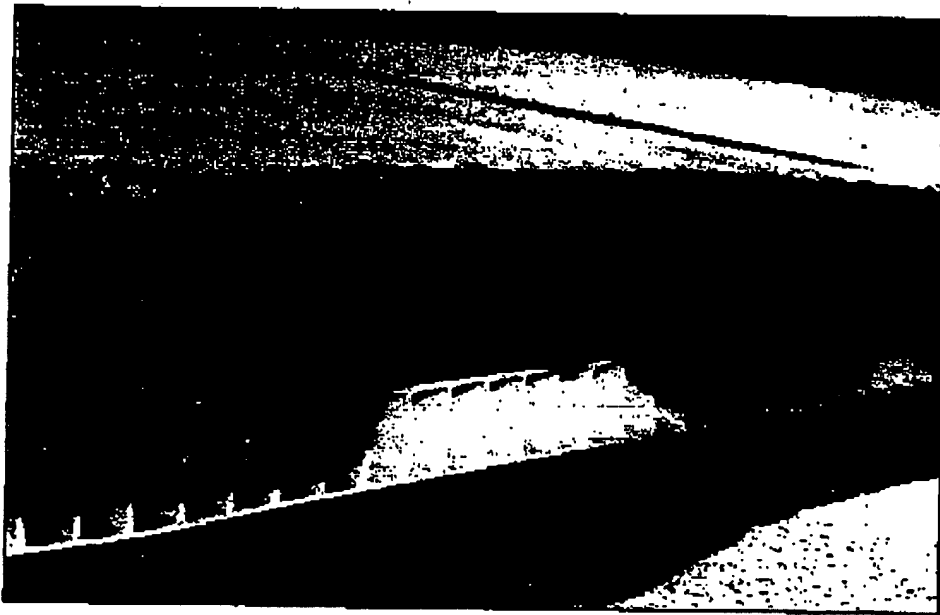


BEST AVAILABLE COPY



Home

Installation Guide

BEST AVAILABLE COPY

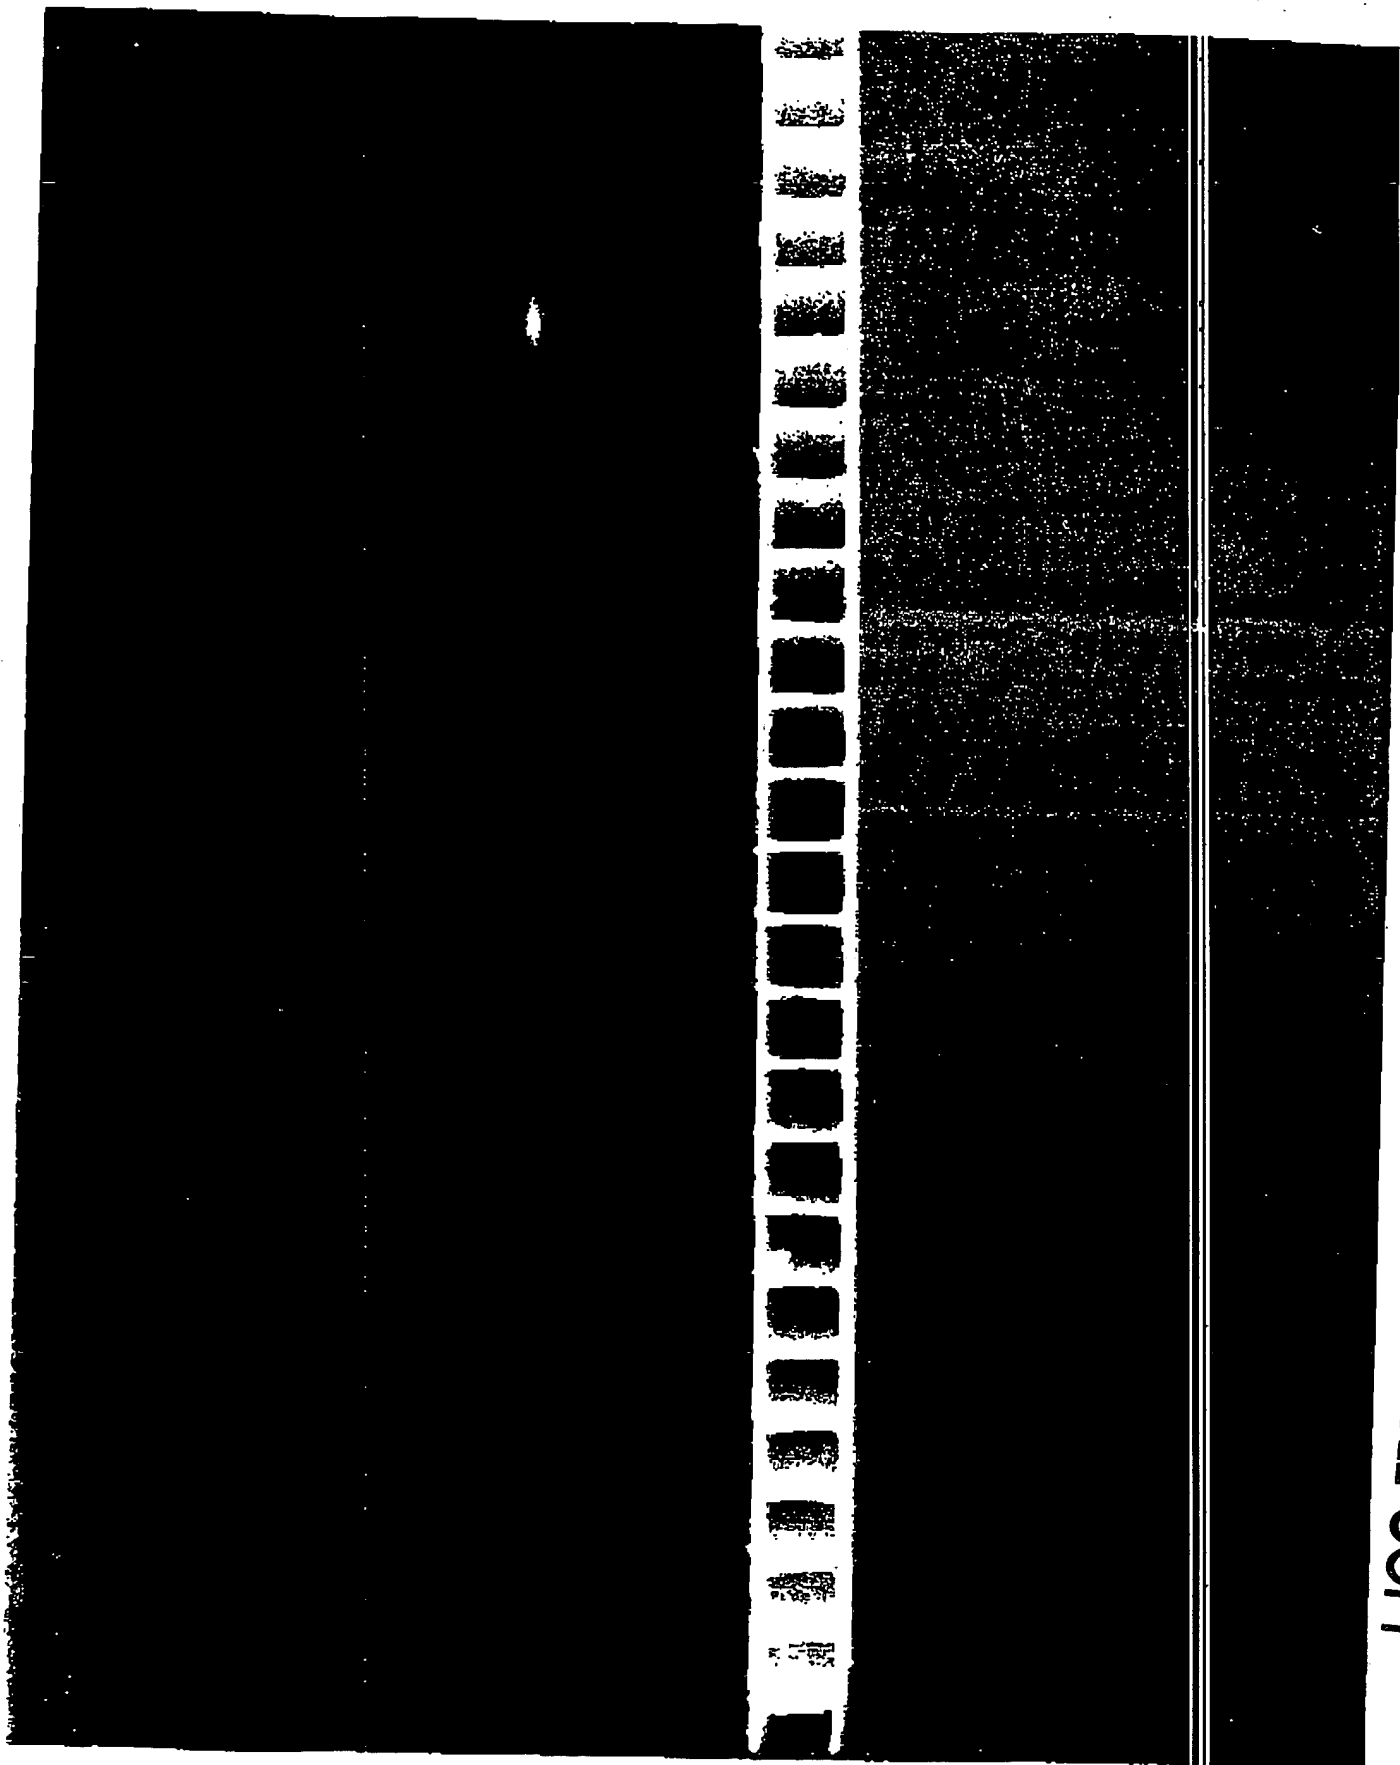

BEST AVAILABLE COPY